

# Capsule pressure gauge, copper alloy Stainless steel case Model 612.20, NS 63 [2 ½"], 100 [4"], 160 [6"]

WIKA data sheet PM 06.02



for further approvals, see  
page 7

## Applications

- For gaseous, dry and non-aggressive media
- Medical, vacuum, environmental, laboratory technology, for contents measurement and filter monitoring

## Special features

- Zero point correction in front
- Case from stainless steel
- Robust design and ingress protection IP54
- Low scale ranges from 0 ... 6 mbar to 0 ... 600 mbar or 0 ... 2.4 inH<sub>2</sub>O to 0 ... 240 inH<sub>2</sub>O



Capsule pressure gauge, model 612.20

## Description

The model 612.20 capsule pressure gauge is based upon the proven capsule measuring system. The capsule element measurement principle is suitable for very low pressures. On pressurisation, the expansion of the capsule element, proportional to the incident pressure, is transmitted to the movement and indicated.

The modular design enables a multitude of combinations of case materials, process connections, nominal sizes and scale ranges. Due to this high variance, the instrument is suitable for use in a wide range of applications within industry.

The case and the bayonet bezel are made from stainless steel. The material of the process connection is a copper alloy.

For mounting in control panels, the capsule pressure gauges can, depending on the process connection, be fitted with a mounting flange or with a triangular profile ring and mounting bracket.

The scale ranges of 0 ... 6 mbar to 0 ... 600 mbar or 0 ... 2.4 inH<sub>2</sub>O to 0 ... 240 inH<sub>2</sub>O and the vacuum and +/- scale ranges ensure the measuring ranges required for a wide variety of applications.

## Specifications

Basic information	
<b>Standard</b>	EN 837-3 → For information on the "Selection, installation, handling and operation of pressure gauges", see technical information IN 00.05
<b>Further version</b>	<ul style="list-style-type: none"> <li>■ Oil- and grease-free</li> <li>■ For oxygen, oil- and grease-free</li> </ul>
<b>Nominal size (NS)</b>	<ul style="list-style-type: none"> <li>■ Ø 63 mm [2 ½"]</li> <li>■ Ø 100 mm [4"]</li> <li>■ Ø 160 mm [6"]</li> </ul>
<b>Connection location</b>	<ul style="list-style-type: none"> <li>■ Lower mount (radial)</li> <li>■ Lower back mount</li> <li>■ Centre back mount (only for NS 63 [2 ½"])</li> </ul>
<b>Window</b>	Instrument glass
<b>Case</b>	
Design	<ul style="list-style-type: none"> <li>■ Without blow-out device</li> <li>■ With blow-out device in case back (only for NS 100 [4"] and NS 160 [6"])</li> </ul>
Material	Stainless steel
Ring	Bayonet bezel, stainless steel
<b>Mounting</b>	<ul style="list-style-type: none"> <li>■ Without</li> <li>■ Surface mounting flange, stainless steel</li> <li>■ Panel mounting flange, stainless steel</li> <li>■ Panel mounting flange, polished stainless steel</li> <li>■ Panel mounting flange, black stainless steel</li> <li>■ Triangular profile ring with mounting bracket, stainless steel <sup>1)</sup></li> <li>■ Triangular profile ring with mounting bracket, polished stainless steel <sup>1)</sup></li> </ul> <p>→ For information on "Mounting types, mounting flanges, panel cutouts", see technical information IN 00.04</p>
<b>Movement</b>	Copper alloy

1) Only for back mount

Measuring element	
<b>Type of measuring element</b>	Capsule element
<b>Material (wetted)</b>	
Capsule element	Copper alloy
Sealing	NBR
Process connection	Copper alloy
<b>Leak tightness</b>	<ul style="list-style-type: none"> <li>■ Leakage rate: <math>&lt; 1 \cdot 10^{-3}</math> mbar l/s</li> <li>■ Helium tested, leakage rate: <math>&lt; 1 \cdot 10^{-5}</math> mbar l/s</li> </ul>


Further details on: Scale ranges		
<b>Dial</b>		
Scale layout	<ul style="list-style-type: none"> <li>■ Single scale</li> <li>■ Dual scale</li> </ul>	
Scale colour	Single scale	Black
	Dual scale	Black/red
Serial number	<ul style="list-style-type: none"> <li>■ Without</li> <li>■ Consecutive number * ... *</li> </ul>	
Material	Aluminium	
Special scale	Other scales or customer-specific dials, e.g. with red mark, circular arcs or circular sectors, on request	
<b>Pointer</b>		
Instrument pointer	Aluminium, black	
Mark pointer/drag pointer	<ul style="list-style-type: none"> <li>■ Without</li> <li>■ Red mark pointer on dial, fixed</li> <li>■ Red mark pointer on window, adjustable (only available for NS 100 [4"] and NS 160 [6"])</li> <li>■ Red drag pointer on window, adjustable</li> </ul>	
<b>Pointer stop pin</b>	<ul style="list-style-type: none"> <li>■ Without</li> <li>■ At zero point</li> <li>■ At 6 o'clock</li> </ul>	

Process connection		
<b>Standard</b>	<ul style="list-style-type: none"> <li>■ EN 837-3</li> <li>■ ISO 7</li> <li>■ ANSI/B1.20.1</li> </ul>	
<b>Size</b>		
EN 837-3	<ul style="list-style-type: none"> <li>■ G 1/8 B, male thread</li> <li>■ G 1/4 B, male thread</li> <li>■ G 1/2 B, male thread</li> <li>■ M20 x 1.5, male thread</li> </ul>	
ISO 7	<ul style="list-style-type: none"> <li>■ R 1/4, male thread</li> <li>■ R 1/2, male thread</li> </ul>	
ANSI/B1.20.1	<ul style="list-style-type: none"> <li>■ 1/4 NPT, male thread</li> <li>■ 1/2 NPT, male thread</li> </ul>	
<b>Restrictor</b>	<ul style="list-style-type: none"> <li>■ Without</li> <li>■ Ø 0.5 mm [0.02"], copper alloy</li> <li>■ Ø 0.3 mm [0.012"], copper alloy</li> </ul>	
<b>Material (wetted)</b>		
Capsule element	Copper alloy	
Sealing	NBR	
Process connection	Copper alloy	

Other process connections on request

## Dimensions in mm [in]

### Lower mount (radial)

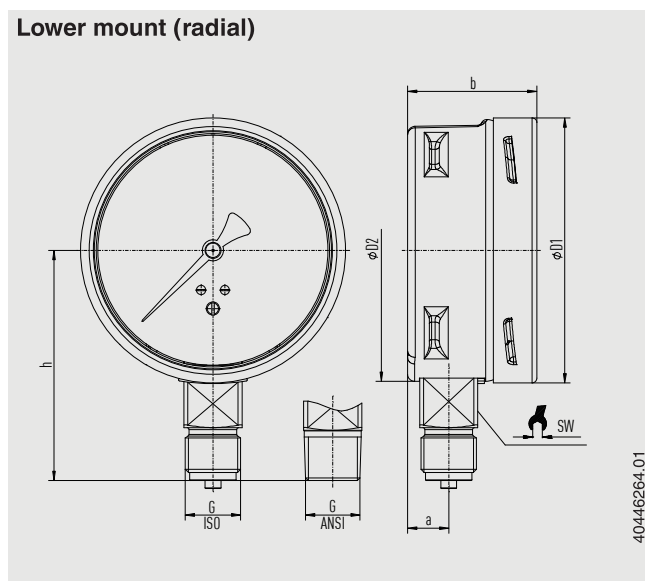

40446264.01

NS	Weight
63 [2½"]	approx. 0.2 kg [0.44 lb]
100 [4"]	approx. 0.6 kg [1.32 lb]
160 [6"]	approx. 1.0 kg [2.2 lb]

### Process connection with thread per EN 837-3

NS	G	Dimensions in mm [in]					
		h ±1 [0.04]	a	b	D1	D2	SW
63 [2½"]	G ⅛ B	49 [1.93]	9.5 [0.37]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
	G ¼ B	52 [2.05]	9.5 [0.37]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
100 [4"]	G ¼ B	80 [3.15]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.9]	22 [0.87]
	G ½ B	87 [3.43]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.9]	22 [0.87]
	M20 x 1.5	87 [3.43]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.9]	22 [0.87]
160 [6"]	G ¼ B	111 [4.37]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]
	G ½ B	118 [4.65]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]
	M20 x 1.5	118 [4.65]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]


### Process connection with thread per ISO 7

NS	G	Dimensions in mm [in]					
		h ±1 [0.04]	a	b	D1	D2	SW
63 [2½"]	R ⅛	49 [1.93]	9.5 [0.37]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
	R ¼	52 [2.05]	9.5 [0.37]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
100 [4"]	R ¼	80 [3.15]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.90]	22 [0.87]
	R ½	86 [3.39]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.90]	22 [0.87]
160 [6"]	R ¼	111 [4.37]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]
	R ½	117 [4.60]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]

### Process connection with thread per ANSI/B1.20.1

NS	G	Dimensions in mm [in]					
		h ±1 [0.04]	a	b	D1	D2	SW
63 [2½"]	⅛ NPT	49 [1.93]	9.5 [0.37]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
	¼ NPT	52 [2.05]	9.5 [0.37]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
100 [4"]	¼ NPT	80 [3.15]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.90]	22 [0.87]
	½ NPT	86 [3.39]	15.5 [0.61]	49.5 [1.95]	101 [3.98]	99 [3.90]	22 [0.87]
160 [6"]	¼ NPT	111 [4.37]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]
	½ NPT	117 [4.60]	15.5 [0.61]	49.5 [1.95]	161 [6.34]	159 [6.26]	22 [0.87]

NS 63 [2 ½"], centre back mount

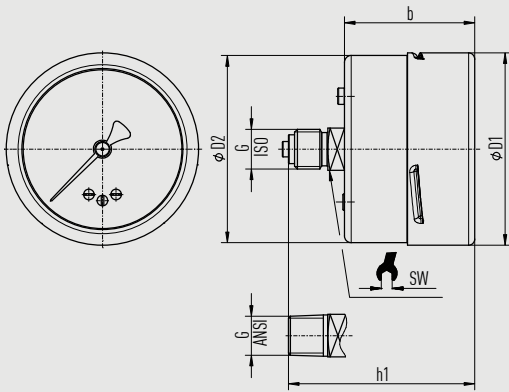

40446266.01

NS	Weight
63 [2½"]	approx. 0.2 kg [0.44 lb]

Process connection with thread per EN 837-3

NS	G	Dimensions in mm [in]				
		$h1 \pm 1 [0.04]$	$b$	D1	D2	SW
63 [2 ½"]	G ½ B	59 [2.32]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
	G ¼ B	62 [2.44]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]


Process connection with thread per ISO 7 or ANSI/B1.20.1

NS	G	Dimensions in mm [in]				
		$h1 \pm 1 [0.04]$	$b$	D1	D2	SW
63 [2 ½"]	R ¼	62 [2.44]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]

Process connection with thread per ISO 7 or ANSI/B1.20.1

NS	G	Dimensions in mm [in]				
		$h1 \pm 1 [0.04]$	$b$	D1	D2	SW
63 [2 ½"]	½ NPT	59 [2.32]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]
	¼ NPT	62 [2.44]	43 [1.69]	63 [2.48]	62 [2.44]	14 [0.55]

NS 100 [4"] and NS 160 [6"], lower back mount

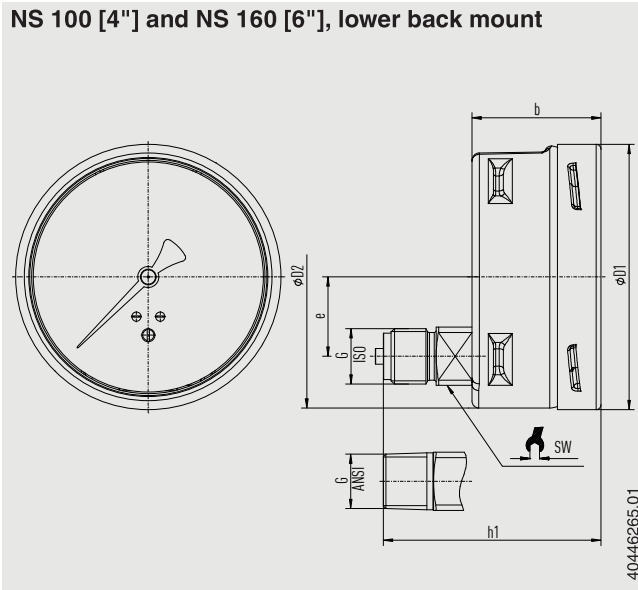

NS	Weight
100 [4"]	approx. 0.55 kg [1.21 lb]
160 [6"]	approx. 1 kg [2.2 lb]

Process connection with thread per EN 837-3

NS	G	Dimensions in mm [in]					
		h1 ±1 [0.04]	b	D1	D2	e	SW
100 [4"]	G ¼ B	76 [2.99]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
	G ½ B	83 [3.27]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
	M20 x 1.5	83 [3.27]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
160 [6"]	G ¼ B	76 [2.99]	49.5 [1.95]	161 [6.34]	159 [6.26]	50 [1.97]	22 [0.87]
	G ½ B	83 [3.27]	49.5 [1.95]	161 [6.34]	159 [6.26]	50 [1.97]	22 [0.87]
	M20 x 1.5	83 [3.27]	49.5 [1.95]	161 [6.34]	159 [6.26]	50 [1.97]	22 [0.87]

Process connection with thread per ISO 7

NS	G	Dimensions in mm [in]					
		h1 ±1 [0.04]	b	D1	D2	e	SW
100 [4"]	R ¼	76 [2.99]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
	R ½	82 [3.23]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
160 [6"]	R ½	82 [3.23]	49.5 [1.95]	161 [6.34]	159 [6.26]	50 [1.97]	22 [0.87]

Process connection with thread per ANSI/B1.20.1

NS	G	Dimensions in mm [in]					
		h1 ±1 [0.04]	b	D1	D2	e	SW
100 [4"]	¼ NPT	76 [2.99]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
	½ NPT	82 [3.23]	49.5 [1.95]	101 [3.98]	99 [3.90]	30 [1.181]	22 [0.87]
160 [6"]	¼ NPT	76 [2.99]	49.5 [1.95]	161 [6.34]	159 [6.26]	50 [1.97]	22 [0.87]
	½ NPT	82 [3.23]	49.5 [1.95]	161 [6.34]	159 [6.26]	50 [1.97]	22 [0.87]